

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
1 August 2002 (01.08.2002)

(10) International Publication Number
PCT WO 02/059929 A2

- (51) International Patent Classification⁷: **H01J 29/00**
- (21) International Application Number: **PCT/US02/00434**
- (22) International Filing Date: **8 January 2002 (08.01.2002)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/767,076 22 January 2001 (22.01.2001) US
- (71) Applicant (for all designated States except US): **THOMSON LICENSING S.A. [FR/FR]; 36, Quai A. Le Gallo, F-92648 Boulogne Cedex (FR).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **DIVEN, Gary, Lee [US/US]; 2560 Saddle Drive, Lancaster, PA 17601 (US). REED, Joseph, Arthur [US/US]; 2665 Wexford Lane, York, PA 17404 (US).**
- (74) Agents: **TRIPOLI, Joseph et al.; Thomson Multimedia Licensing Inc., P.O. Box 5312, Princeton, NJ 08540 (US).**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: **COLOR PICTURE TUBE HAVING A LOW EXPANSION TENSION MASK ATTACHED TO A HIGHER EXPANSION FRAME**

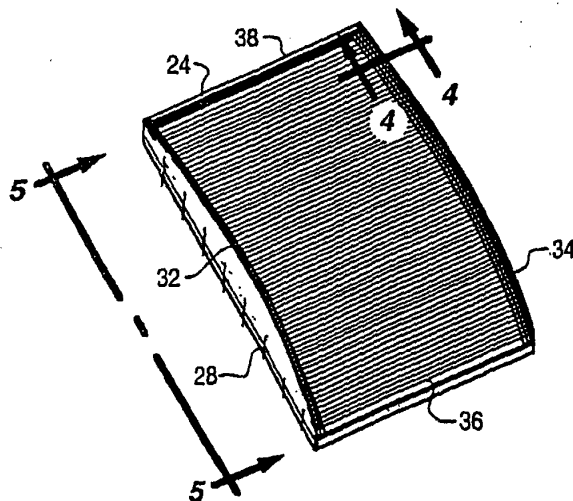

(57) Abstract: A color picture tube (10) has a tensioned mask (24) supported by a support frame (28) mounted within said tube. The mask has a significantly lower coefficient of thermal expansion than the frame. Intermediary members (48) are located between the mask and the frame. The intermediary members are of a material having a coefficient of thermal expansion similar to that of the mask. Each of the intermediate members is attached to the frame by a plurality of connectors (50). Each of the connectors is elongated, and each of the connectors is attached at one end thereof to one of intermediate members and attached at an opposite end to said frame.

WO 02/059929 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

COLOR PICTURE TUBE HAVING A LOW EXPANSION TENSION MASK ATTACHED
TO A HIGHER EXPANSION FRAME

This invention relates to color picture tubes having tension masks, and particularly to
5 a tube having means for connecting a tension mask, that is made of a material having a
relatively low coefficient of thermal expansion material, to a support frame, that has a
significantly higher coefficient of thermal expansion.

Background Of The Invention

A color picture tube includes an electron gun for generating and directing three
10 electron beams to the screen of the tube. The screen is located on the inner surface of a
faceplate of the tube and is made up of an array of elements of three different color-emitting
phosphors. A color selection electrode, which may be either a shadow mask or a focus mask,
is interposed between the gun and the screen to permit each electron beam to strike only the
phosphor elements associated with that beam. A shadow mask is a thin sheet of metal, such
15 as steel, that is usually contoured to somewhat parallel the inner surface of the tube faceplate.

One type of color picture tube has a tension mask mounted within a faceplate panel
thereof. In order to maintain the tension on the mask, the mask must be attached to a
relatively massive support frame. Although such tubes have found wide consumer
acceptance, there is still a need for further improvement, to reduce the weight and cost of the
20 mask-frame assemblies in such tubes.

It has been suggested that a lighter frame could be used in a tension mask tube if the
required tension on a mask is reduced. One way to reduce the required mask tension is to
make the mask from a material having a low coefficient of thermal expansion. However, a
mask from such material requires a support frame of a material having a similar coefficient of
25 thermal expansion, to prevent any mismatch of expansions during thermal processing that is
required for tube manufacturing, and during tube operation. Because the metal materials that
have low coefficients of thermal expansion are relatively expensive, it is costly to make both
the mask and frame out of identical or similar low expansion materials. Therefore, it is
desirable to use the combination of a low expansion tension mask with a higher expansion
30 support frame, and to provide a solution to the problem that exists when there is a substantial
mismatch in coefficients of thermal expansion between a tension mask and its support frame.

Summary Of The Invention

The present invention provides a color picture tube having a tensioned mask supported by a support frame mounted within the tube. The mask has a significantly lower coefficient of thermal expansion than the frame. Intermediate members are located between the mask and the frame. The intermediate members are of a material having a coefficient of thermal expansion similar to that of the mask. Each of the intermediate members is attached to the frame by a plurality of connectors. Each of the connectors is elongated, and each of the connectors is attached at one end thereof to one of the intermediate members and attached at an opposite end to the frame.

Brief Description Of The Drawings

In the drawings:

FIGURE 1 is a side view, partly in axial section, of a color picture tube embodying the invention.

FIGURE 2 is a perspective view of a tension mask-frame assembly.

FIGURE 3 is a partial perspective view of the mask-frame assembly of FIGURE 2.

FIGURE 4 is a cross-sectional view of the mask-frame assembly taken at line 4-4 of FIGURE 2.

FIGURE 5 is a front view of the mask-frame assembly taken at line 5-5 of FIGURE 2.

Detailed Description Of The Preferred Embodiments

FIGURE 1 shows a color picture tube 10 having a glass envelope 11 comprising a rectangular faceplate panel 12 and a tubular neck 14 connected by a funnel 15. The funnel 15 has an internal conductive coating (not shown) that extends from an anode button 16 toward the panel 12 and to the neck 14. The panel 12 comprises a substantially cylindrical or flat viewing faceplate 18 and a peripheral flange or sidewall 20, which is sealed to the funnel 15 by a glass frit 17. A three-color phosphor screen 22 is carried by the inner surface of the faceplate 18. The screen 22 is a line screen with the phosphor lines arranged in triads, each triad including a phosphor line of each of the three colors. A color selection tension mask 24 is removably mounted in predetermined spaced relation to the screen 22. An electron gun 26, shown schematically by dashed lines in FIGURE 1, is centrally mounted within the neck 14 to generate and direct three inline electron beams, a center beam and two side or outer beams, along convergent paths through the mask 24 to the screen 22.

3

The tube 10 is designed to be used with an external magnetic deflection yoke, such as the yoke 30 shown in the neighborhood of the funnel-to-neck junction. When activated, the yoke 30 subjects the three beams to magnetic fields which cause the beams to scan horizontally and vertically in a rectangular raster over the screen 22.

5 The tension mask 24, as shown in FIGURE 2, is interconnected to a peripheral frame 28 that includes two long sides 32 and 34, and two short sides 36 and 38. The two long sides 32 and 34 of the frame parallel a central major axis, X, of the tube; and the two short sides 36 and 38 parallel a central minor axis, Y, of the tube. The tension mask 24 includes an apertured portion that contains a plurality of metal strips having a multiplicity of elongated
10 slits therebetween that parallel the minor axis of the mask.

As shown in greater detail in FIGURES 3 and 4, each of the two long sides 32 and 34 (not shown) of the frame 28 includes an L-shaped section 40 having an inner flange 43 and an outer flange 44. A slanted section 42 extends between the two flanges, of the L-shaped section 40 to form a triangular cross-section. An intermediate member 48, as shown in
15 FIGURES 3, 4 and 5, is movably attached to the outer flange 44 of each L-shaped section 40. Each intermediate member 48 extends the length of a long side, 32 and 34, and overlaps the outer flange 44. The intermediate members 48 are slidably affixed to the outer flanges 44 of the frame 28 by rivets 49 that are located at each end of the intermediate members 48. The rivets 49 are attached to the outer flanges 44, but ride in elongated slot apertures in the
20 intermediate members 48. The purpose of the rivets is to keep the intermediate member 48 in contact with the frame 28 and to limit any twisting motion of the intermediate member relative to the frame. Also interconnecting the intermediate members 48 to the frame 28 are a plurality of elongated connectors 50 that extend from the outer surface of the intermediate members 48 to a surface of the inner flanges 43. Opposite ends of the intermediate members
25 48 are welded to the frame 28 and to the intermediate member 48, respectively. The intermediate members 48 are of a material that has a low coefficient of thermal expansion similar to that of the mask 24. Therefore, changes of temperature that cause the mask to expand will have little effect on the position of the mask 24 relative to the intermediate members 48. For example, a mask having a low coefficient of thermal expansion attached
30 without a like intermediate member will become excessively stretched in the tube major axis direction during tube assembly, and permanent wrinkles will develop in the mask. Also, an intermediate member having a low coefficient of thermal expansion attached without a

plurality of elongated connectors will cause an uncorrectable warping of the frame and mask during tube operation, which will distort the displayed image.

The short sides 36 and 38 of the frame 28 are tubes 52 having rectangular cross-sections. The ends of the tubes 52 are interconnected to the ends of the inner flanges 43
5 through four stand-off sections 54. Angled mounting brackets 55 are attached to the frame 24 and are located at the four corners of the frame.

In one embodiment, the side tubes 52, the stand-off sections 54, the L-shaped sections 40 and the slanted section 42 are made from 4130 steel and the intermediate members 48 are of Invar. The side tubes 52 are 2.54 cm by 1.27 cm and 1.24 mm thick (1"x1/2" and 0.049").
10 The stand-off sections 54 are 1.59 cm by 1.59 cm and 1.52 mm thick (5/8"x5/8" and 0.060"). The L-shaped sections 40 and the slanted sections 42 are 1.27 mm (0.050") thick. The intermediate members 48 are 3.05 mm (0.120") thick. The spacing between the connectors 50 is about 5.08 cm (2.0"). In general, thicknesses of the component parts of the complete frame assembly are determined by considering mask thickness, the flexibility of the total mask-
15 frame assembly and the desired warp misregistration limits.



In most embodiments, all of the connectors 50 can be of the same material. However, there are other embodiments where the connectors 50 are made of different materials, shapes or sizes to accommodate masks, frames and intermediate members of differing constructions.

Although the short sides of the frame have been shown as hollow rectangular tubes,
20 other preferred configurations, such as those having L-shaped, C-shaped or triangular-shaped cross-sections, are also possible for these sides. Furthermore, although the long sides of the frame 28 have been shown as having triangular cross-sections formed from L-shaped sections 40 and slanted sections 42, other configurations also may be used, such as C-shaped or L-shaped.

25

CLAIMS

1. A color picture tube (10) having a tension mask (24) supported by a support frame (28) mounted within said tube, characterized by:
 - 5 said mask having a significantly lower coefficient of thermal expansion than said frame,
intermediate members (48) located between said mask and said frame, said intermediate members being of a material having a coefficient of thermal expansion similar to that of said mask, each of said intermediate members being attached to said frame by a
10 plurality of connectors (50), each of said connectors being elongated, and each of said connectors being attached at one end thereof to one of said intermediate members and being attached at an opposite end to said frame.
 2. The color picture tube as defined in claim 1, wherein said connectors are rigid
15 wires that are welded to both said intermediate members and said frame.
 3. The color picture tube as defined in claim 1, wherein said mask is made from Invar and said frame is made from steel.

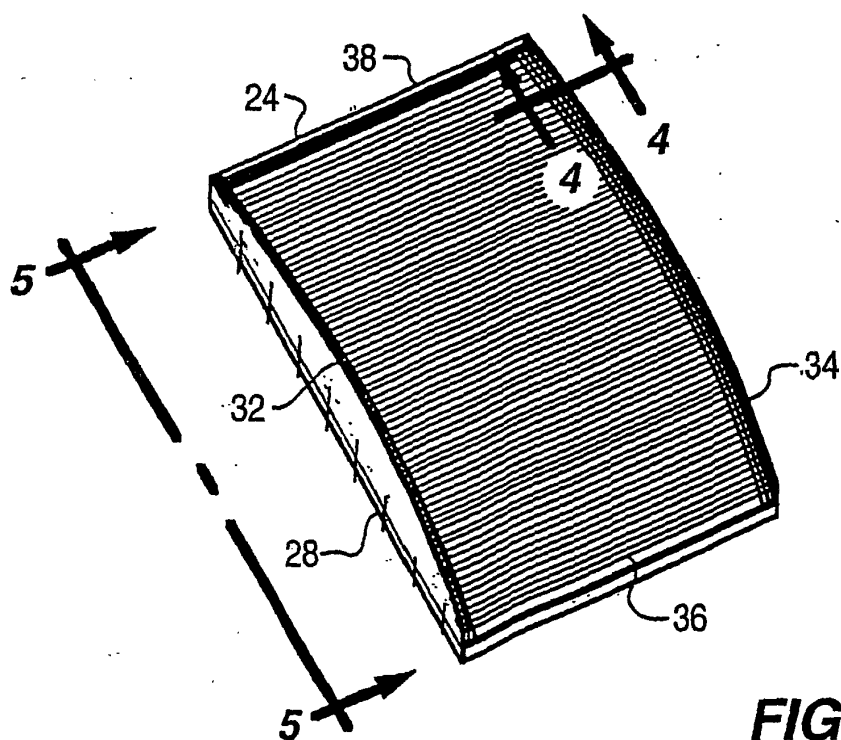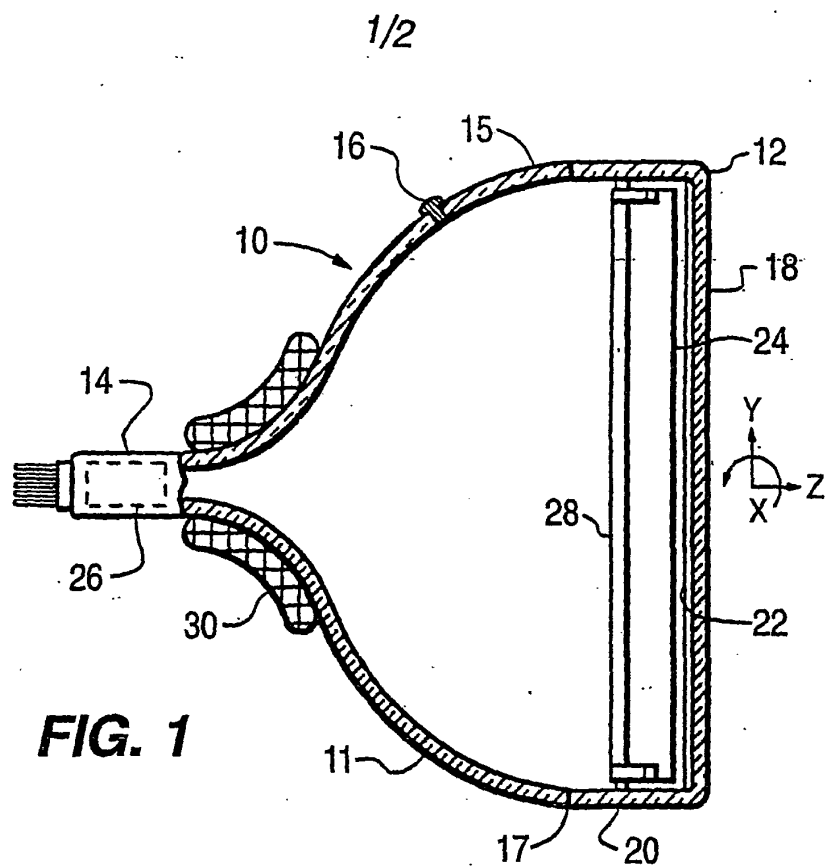

2/2

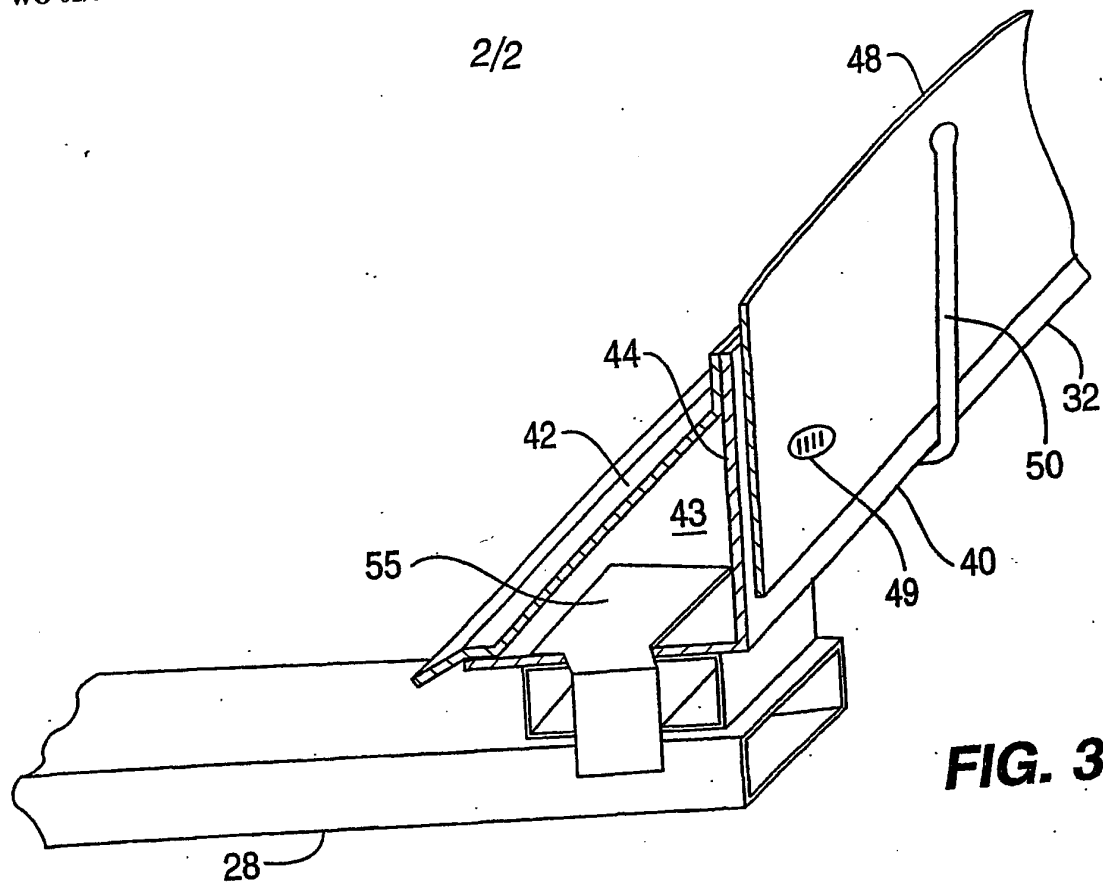


FIG. 3

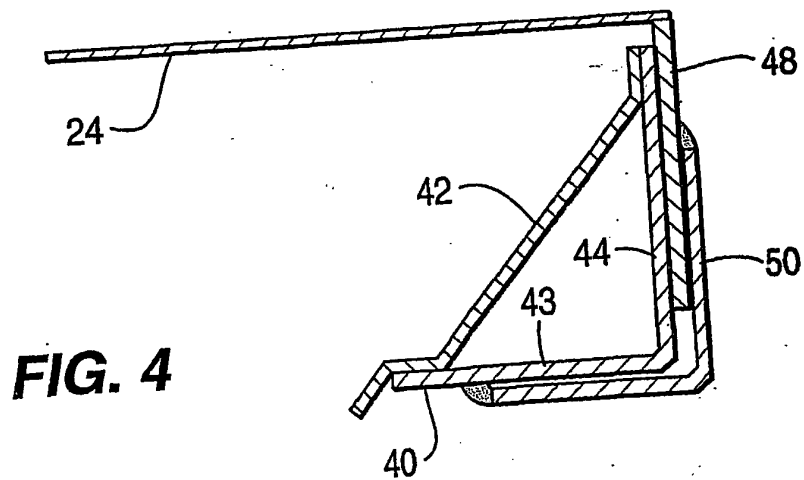


FIG. 4

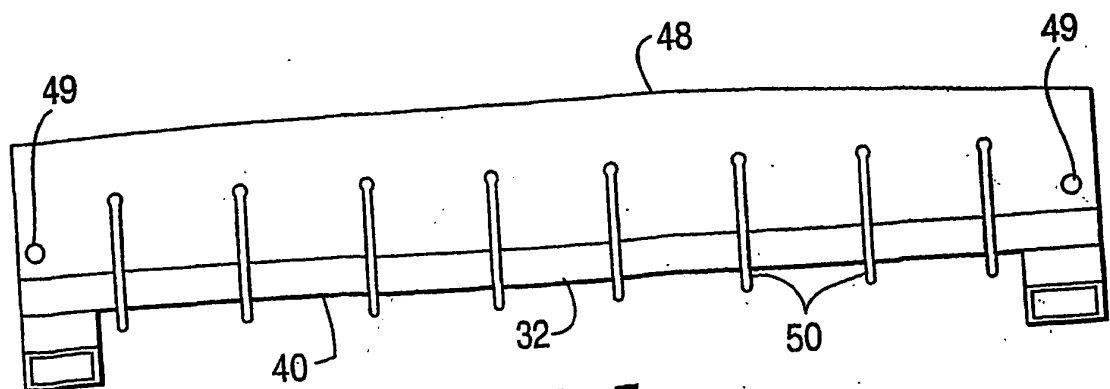


FIG. 5

